

Bauder LiquiTOP PU

V6 22.07.2024

Product description

LiquiTOP PU is a single component, moisture triggered polyurethane, cold applied liquid waterproofing resin, for use in LiquiTOP Roof Systems. It is applied by roller and is fully reinforced with Bauder LiquiTOP Glass Fibre Mat. The moisture triggered technology utilises atmospheric and substrate moisture to initiate the curing mechanism forming a fully cross linked polymeric waterproofing membrane.



Application fields

LiquiTOP PU is used as the waterproofing of the Bauder LiquiTOP Roof Systems. It is suitable for use in cold roof and warm roof situations. It is compatible with a variety of roof surfaces, including asphalt, bituminous felt, PVC single ply, concrete and metals.



Article Number

GB81008200 – LiquiTOP PU Dark Grey
GB81008210 – LiquiTOP PU Mist Grey

Characteristic	Unit	Value
Gross Weight	kg	23.39
Net weight	kg	22.2
Content Volume	litre	15
Colour		Mist Grey (approx. RAL 7040)  Dark Grey (approx. RAL 7011) 
Base		Polyurethane
Solid Content by mass	%	88
by volume		83
Coverage as a fully reinforced system (dependant on roughness and porosity of substrate)	litre/m ²	Dependant on system specified See Bauder project specification and BBA Certificate
Shelf life unopened	months	12
Ambient and substrate temperature	°C	5 to +30 (Where the temperature falls outside of this, please refer to Summer & Winter Advice documents from Bauder).
Atmospheric relative humidity	%	≤ 95
Substrate moisture	%	<28% WME (Wood Moisture Equivalent) 5% moisture content for concrete
Dew point	°C	3° above dew point
Curing time* at 20°C at 10°C at 5°C	hours	6-12 approx. 12-18 approx. 18-24 approx.
Rainproof		1
Overcoat / traffic time		Minimum 6 Maximum 5 days, after this period the surface will need to be reactivated. Avoid intercoat contamination.

Technical data sheet



Emptying and disposal guidance

Containers which have been emptied, but not washed out in line with the specific methods and calculations prescribed in WP1 and WM3, should be classified as packaging containing residues of/ or contaminated by hazardous substances using waste code 15-01-10. Containers with hazardous residues that have been emptied and washed-out in line with the method and calculations which are detailed in the industry guidance can be classified as non-hazardous waste packaging.

Further information/ documents

Current documents such as brochures, installation guides, etc. can be found by visiting www.bauder.co.uk

Certification and environmental information

BBA Certificate	20/5789
Environmental Product Declaration	EPD-FEI-20180092-IBG1-EN

International Standards Organisation (ISO)

ISO 9001:2015 Quality Management Certificates EN1271 and FM 01892
ISO 14001:2015 Environmental Management Certificates A10552 and EMS 59737

Installation Guidance

Installation is to be carried out by Bauder Approved Contractors in accordance with the specification and guidelines. Please consult the Bauder Technical Department.

Substrate assessment / pre-treatment / preparation

Ensure that the substrate is clean, dry and free from dust, laitance, grease, oil and any other contamination, including surface applied curing membranes or treatments. The substrate must be assessed, treated and prepared in accordance with the Bauder project specification.

Initial mixing

Mixing is not required, however if the product is settled or separated on opening, stir gently but thoroughly in order to achieve a uniform colour.

Installation

Apply by roller to the substrate. Brushes may be used for small detail areas. For full details refer to the Bauder project specification.

Waterproofing Membrane

Apply a first/embedment coat of Bauder LiquiTOP PU with a roller or brush at a minimum rate of 1 litre/m². Rough or absorbent substrates may require more material. Always apply to details prior to waterproofing horizontal surfaces.

Whilst wet, reinforce by inserting the Bauder LiquiTOP Glass Fibre Mat, ensuring there are no creases. The glass-fibre mat breaks down into individual fibres when embedded with Bauder LiquiTOP PU, which mitigates the risk of creasing. Overlap the glass-fibre mat a minimum of 50mm on itself to ensure consistent reinforcement of the coating. For best results, allow the first coat to cure overnight and ensure surfaces ready for coating are clean, dry and free from any other contaminants. Remove any extra dust to avoid any intercoat contamination before applying the subsequent top coat(s) of Bauder LiquiTOP PU in the alternate colour dependant on the specified system.

For the LiquiTOP System, apply one top coat at a minimum 1 litre/m².

For the LiquiTOP 3COAT System, apply two top coats at 0.75 litre/m² each, allowing the intermediate coat to cure before applying the final top coat.

Either colour may be used as the embedment or top coat, but it is our suggestion that Dark Grey is used for the top coat.


Optional Maintenance Walkway Wearing Course

For areas where pedestrian access is required for maintenance purposes, a heavy duty wearing course can be applied as follows:


Apply a minimum 0.25 litre/m² of LiquiTOP PU to the designated areas and broadcast Bauder Quartz (0.4 - 1.2mm or 0.3 - 0.6mm) at a minimum 0.25 kg/m² or as required to meet specific purposes. Once cured, brush off loose quartz and dispose. If desired, apply a finish/seal coat of LiquiTOP PU to the quartz course at a minimum rate of 0.25 litre/m².

Note: Consumption rates are based on smooth, even, non-absorbent substrates.

LiquiTOP System

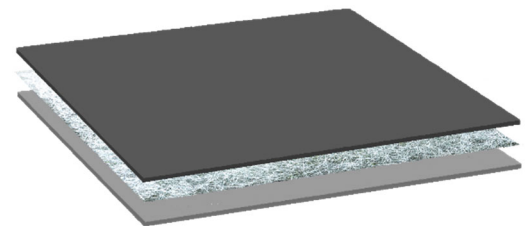

LiquiTOP 3COAT System

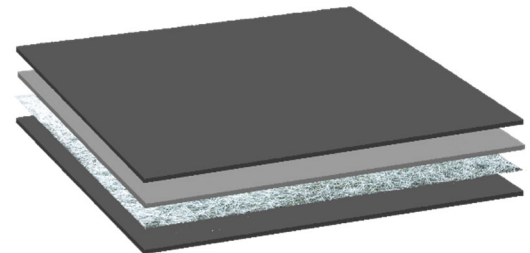

Safety Data Sheets are designed to provide the necessary information to recipients of substances and mixtures in the EU & UK. This product is classed as a substance/mixture; therefore, this product does have a requirement for a Safety Data Sheet.

