


Liquid applied cold roof covering system - cold applied

LiquiBALKON Balcony & Walkway Plywood System

Two coat PMMA waterproofing with polyester fleece reinforcement, cold applied liquid balcony and walkway system suitable for new build and refurbishment applications with direct pedestrian traffic on plywood decks. A hard-wearing granular quartz finish provides a trafficable surface.

	Function	Product name	Thickness (mm)	Weight (kg/m ²)
1	Aesthetic seal coat	LiquiFINISH	1	0.65
2	Aggregate bond coat	LiquiBALKON and Bauder Quartz	3	7.5
3	Waterproofing	LiquiBALKON applied in 2 coats, reinforced with 110g Reinforcement Fleece	2	3.11
	Primer	Varies depending upon substrate type – please refer to specification	nominal	nominal
System Build-up			6	11.26
In-depth and up-to-date product specific technical data is available for each element within a system. Download from our website bauder.co.uk/technical-centre				

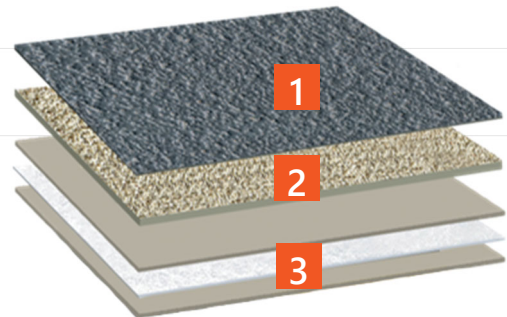

Characteristics of the system

- Quick curing polymethylmethacrylate system
- Seamless cold applied liquid.
- UV resistant.
- Solvent, halogen and isocyanate free.
- Comprehensive guarantee packages to meet project requirements.

System summary



Accreditations and approvals



System variations are available to the specifier so that a tailored solution meets the needs of the building. The selection of products should be confirmed with our technical department to ensure suitability for the individual construction requirements of the flat roof.

E: technical@bauder.co.uk

T: 01473 257671

OPTIONS AVAILABLE

In-depth and up-to-date product specific technical data is available for each component within a system. Download from our website bauder.co.uk/technical-centre

Membrane finish colours

LiquiDETAIL is Blue Grey (RAL 7031) as standard.

LiquiBALKON is Pebble Grey (RAL 7032) as standard



Blue grey
RAL 7031



Stone grey
RAL 7030



Traffic grey
RAL 7043

System fire performance

Please contact the Bauder Technical Dept to check if the system assembly stated has an independently tested performance against fire or are deemed to satisfy approval.